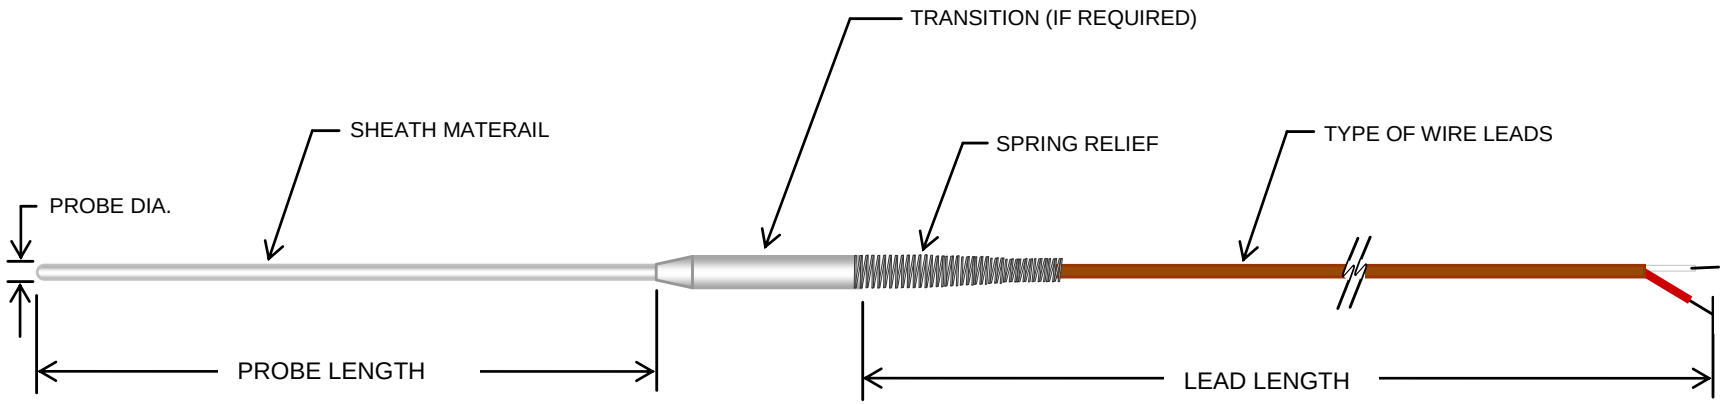

304 - 062 – J – S – G – 20 - TL4 – 24 – 0 – BW – 0 – S .

SPECIAL: CONFIGURATION, DETAIL, CONCEPT, COMPONENTS ETC…

THREADED ADAPTERS: HEX FITTINGS, COMPRESSION FITTINGS, FLUID SEALS ETC…

TERMINATION: BARE WIRE, PLUG, JACK, RING LUGS, TERMINALS ETC…

CABLE PROTECTION: SS OVERBRAID, FLEX ARMOR, RUBBER SLEEVE ETC…

CABLE LENGTH: ANY LENGTH IN INCHES

CABLE INSULATION: PVC, TEFLON, FIBERGLASS, KAPTON ETC…

PROBE LENGTH: ANY LENGTH IN INCHES

JUNCTION STYLE: TC: GROUNDED, UNGROUNDED, EXPOSED, ETC… RTD: ALPHA

CONFIG: TC: SINGLE, DUAL, MULTIPOINT ETC… RTD: S2, 3 OR 4, D2, 3 or 4 (Single or Dual)

SENSOR TYPE: TC'S: J, K, T, E, R, S, ETC… RTD'S: 100Ohm, 500Ohm, 1000Ohm, 120Ni…

PROBE DIAMETER: .063, .125, .188, 250, .375 ETC… (SINGLE TC's .010, .020, .040)

SHEATH MATERIAL: 304SS, 316SS, INCONEL, HASTELOY ETC…

NOTE:
THERMOMETRICS HAS THE CAPABILITIES TO MEET MOST CUSTOMER REQUIRED SPECIAL APPLICATIONS. ALL SPECIALTIES BASED ON CUSTOMER PROVIDED DETAILS. APPROVALS REQUIRED PRIOR FOR PRODUCTION RUN. CALIBRATION IS ALSO AVAILABLE UPON REQUEST FOR AN ADDITIONAL SETUP AND CAL POINT FEE.
ACCESSORIES: THERMOWELLS, FLANGES, DIGITAL DISPLAYS, CONTROLLERS, TRANSMITTERS, ENCLOSURES ETC…