


REV	DESCRIPTION	DATE

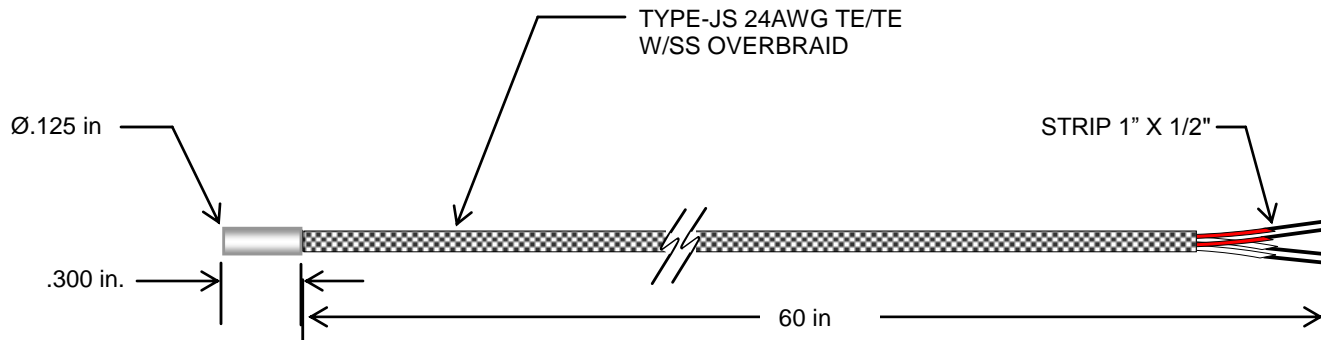

Approved by: \_\_\_\_\_

**Specifications**

**ELEMENT:** TYPE-J (IRON/CONSTANTAN) Special limits of error  
**CONFIG:** Dual  
**TEMP RANGE:** -180 to 260°C (-300 to 500°F)  
**CASE:** 300 series Stainless Steel.  
**LEADS:** Teflon jacket/Insulation/SSOB. (Teflon 0-500°F)  
**TIME CONSTANT RANGE:** Typical value in moving water.  
 • Grounded Junction: 0.3 Seconds  
 • Ungrounded Junction: 1-6 Seconds  
**INSULATION RESISTANCE:** 10megaOhms min. at 100VDC, leads to case, ungrounded junctions only.

18714 PARTHENIA STREET - NORTHRIDGE - CALIFORNIA 91324 - USA  
 PHONE: (818) 886-3755 - FAX: (818) 772-7690

**PRODUCTION CODE:** SS-125-S-J-G-.3-L3-60-SS60-BW-0



**PART NO.** T131-00000210      **OCR #** 24929

**DESCRIPTION:** BEARING TC

**DATE:** 04/22/10      **REV:** NC